




DIN EN
806

DIN EN
1717

DIN
1988

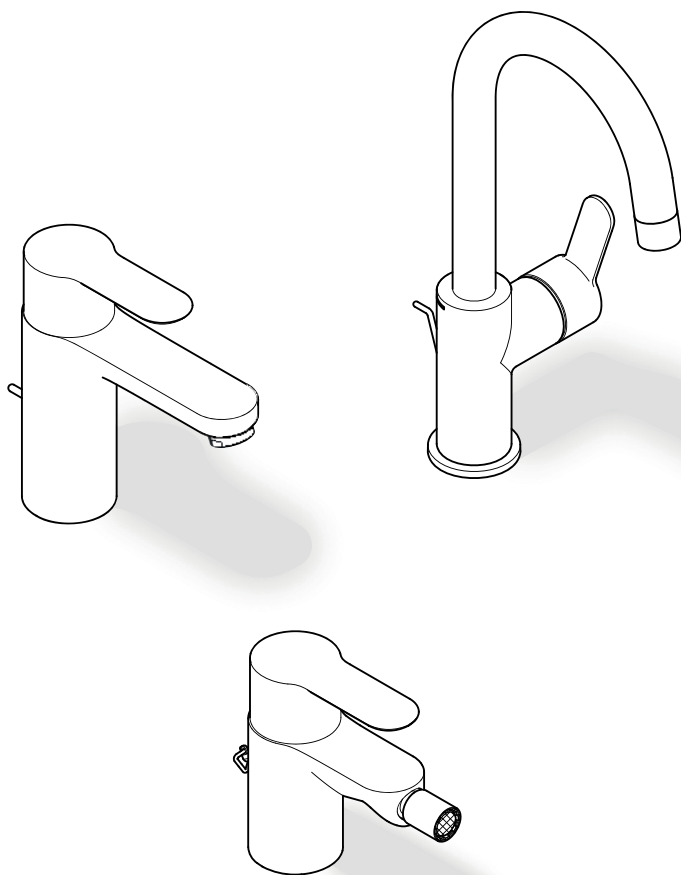

bar

max.
10
0,5





5
1




max.
70°



60°

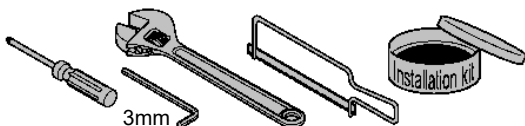

3mm



13mm

*19 017




*19 332

32mm






1

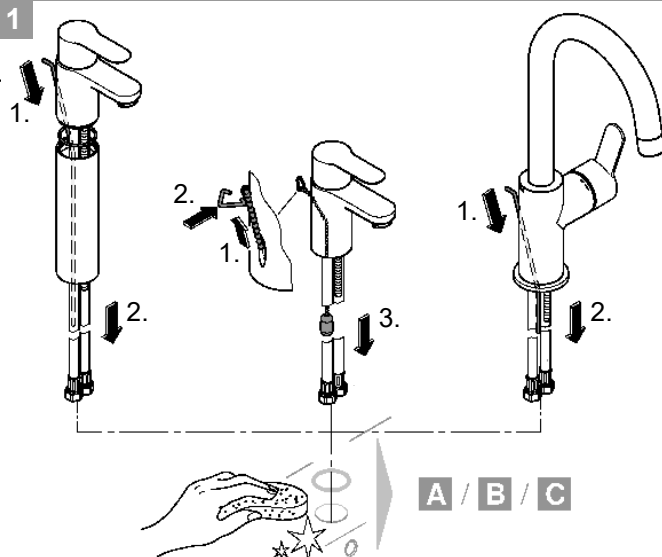

A / B / C


2

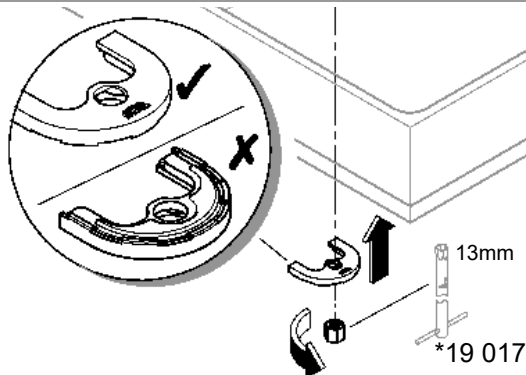

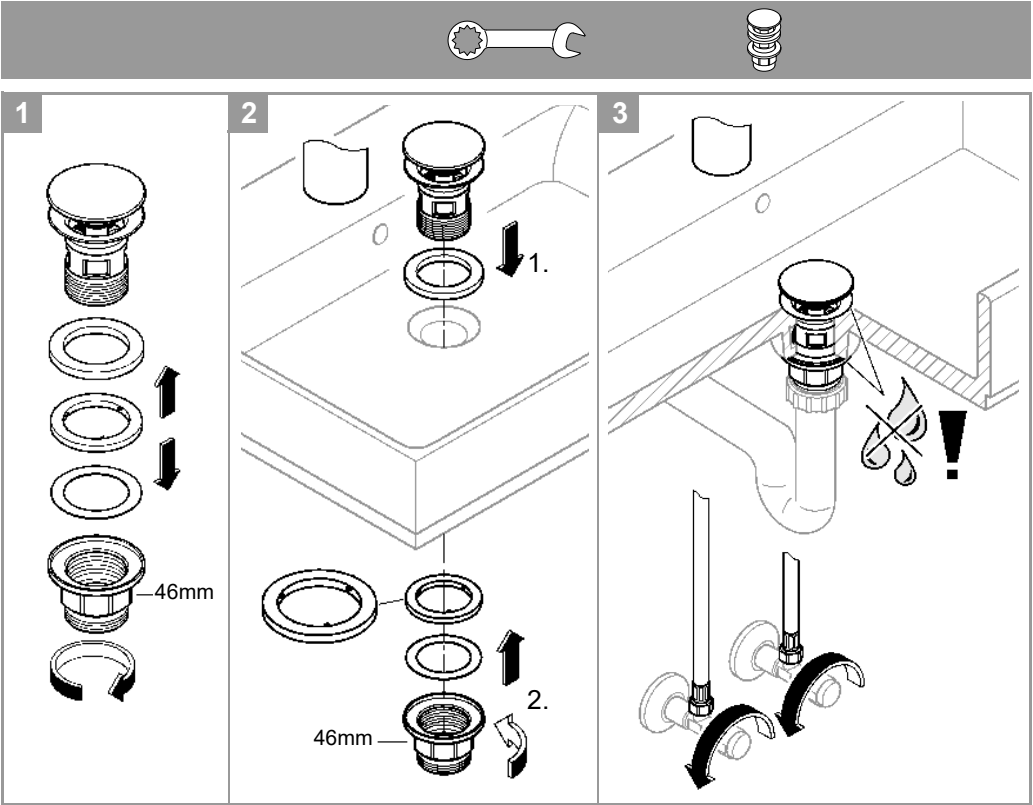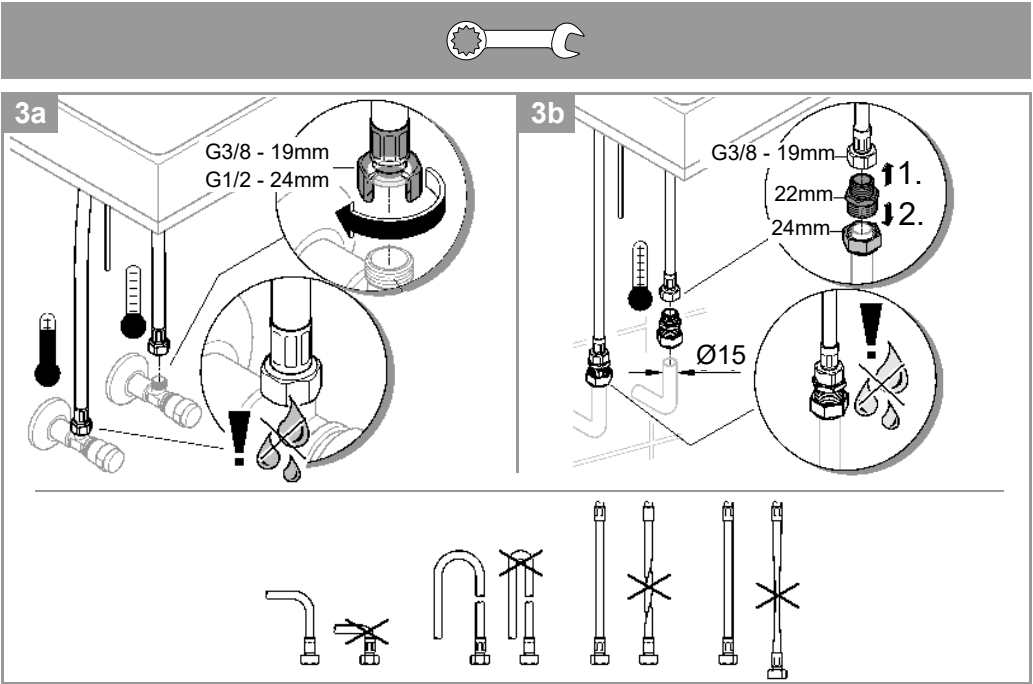





1

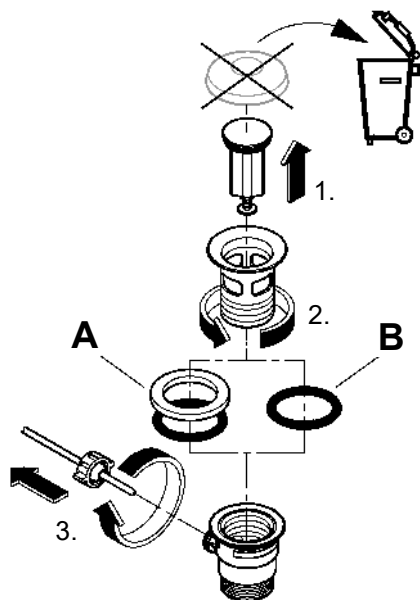


2

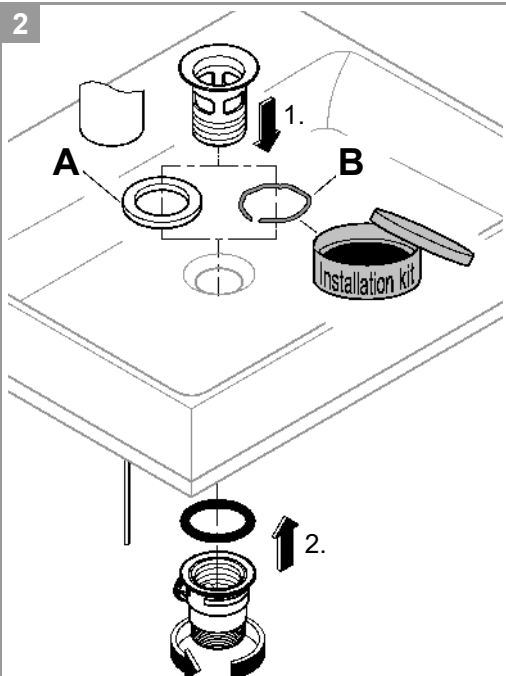

3

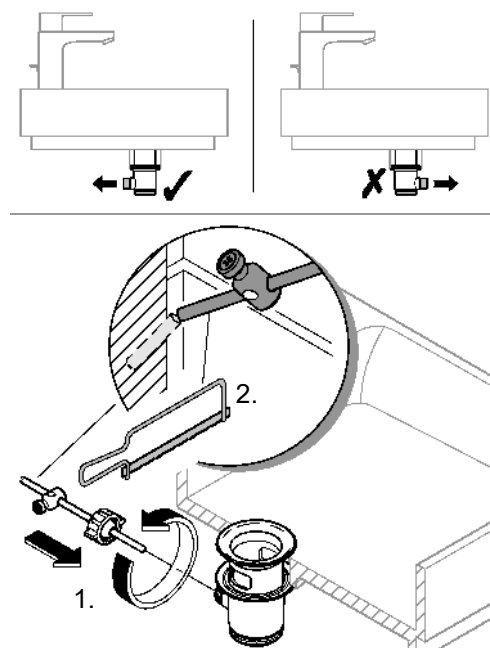


4

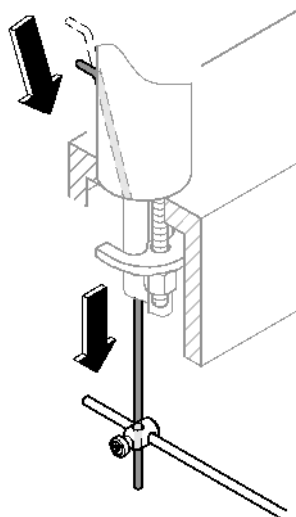




5

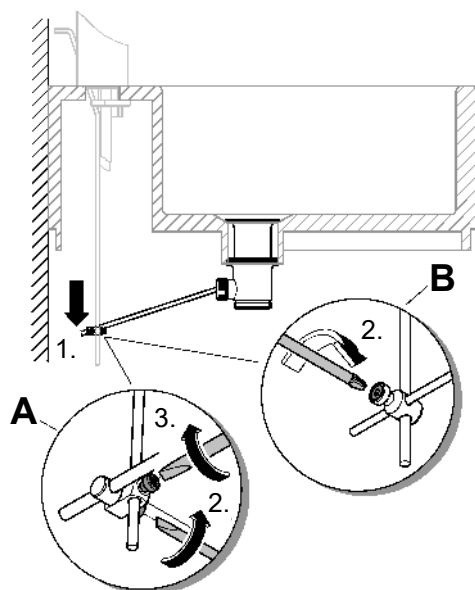

6

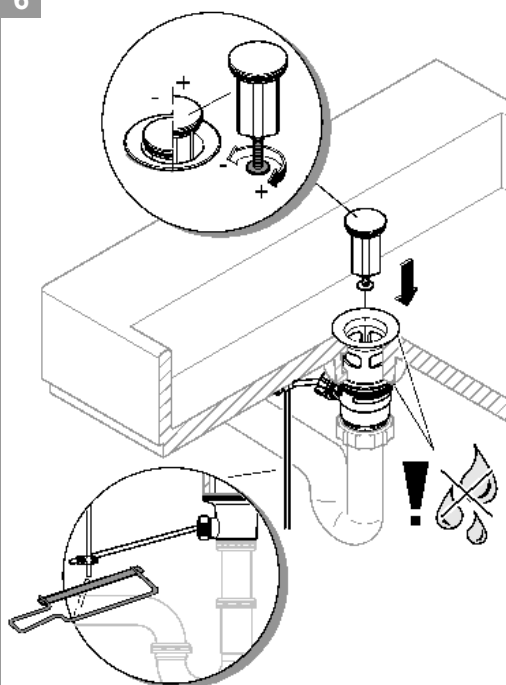

optional

