




DIN EN
806

DIN EN
1717

DIN
1988

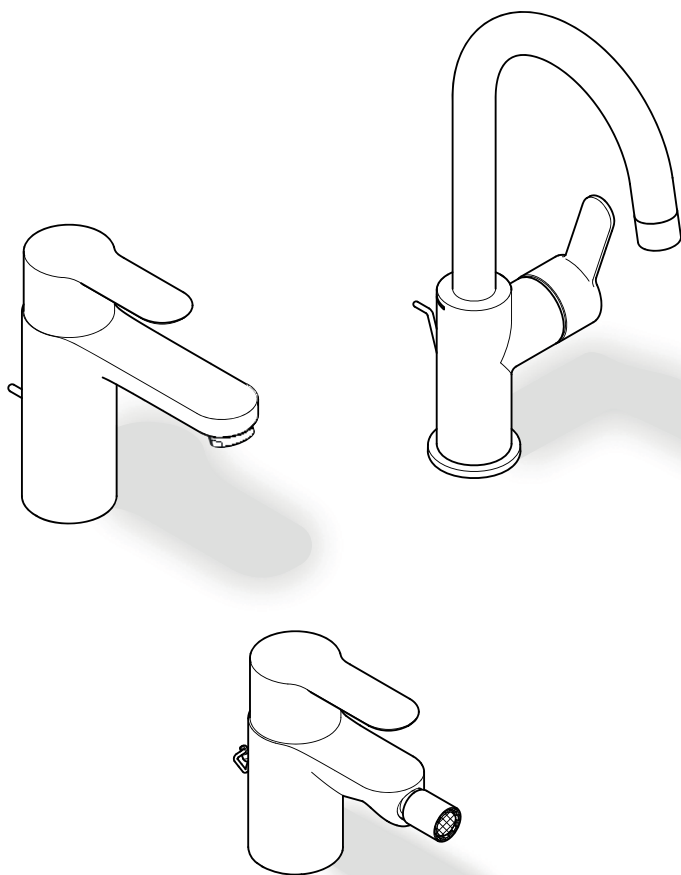

bar

max.
10
0,5






5
1





max.
70°




60°

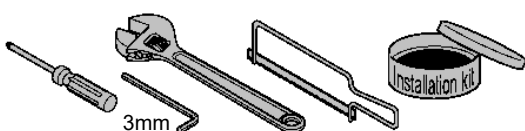



1

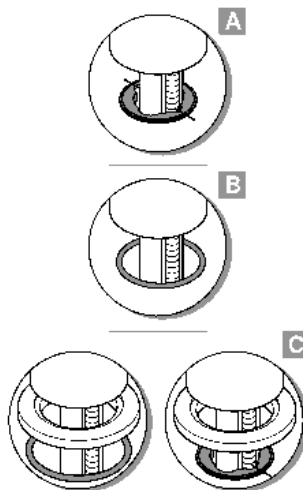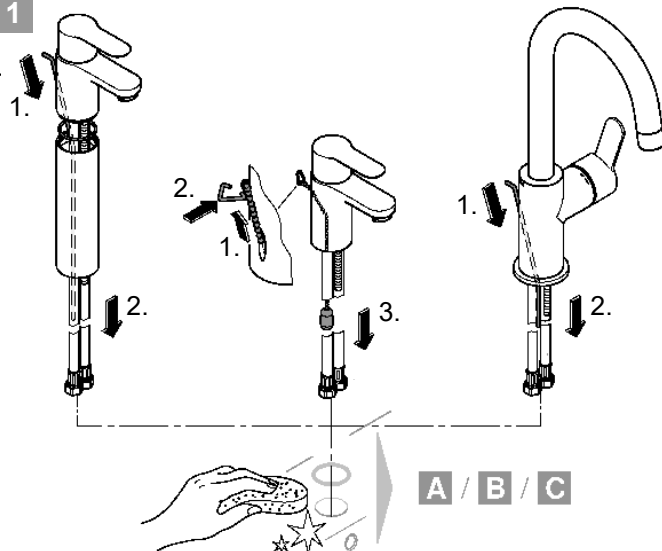


2

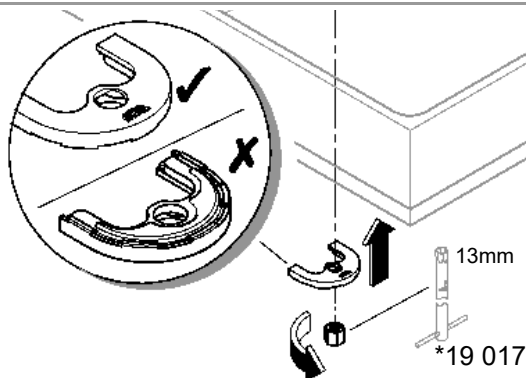

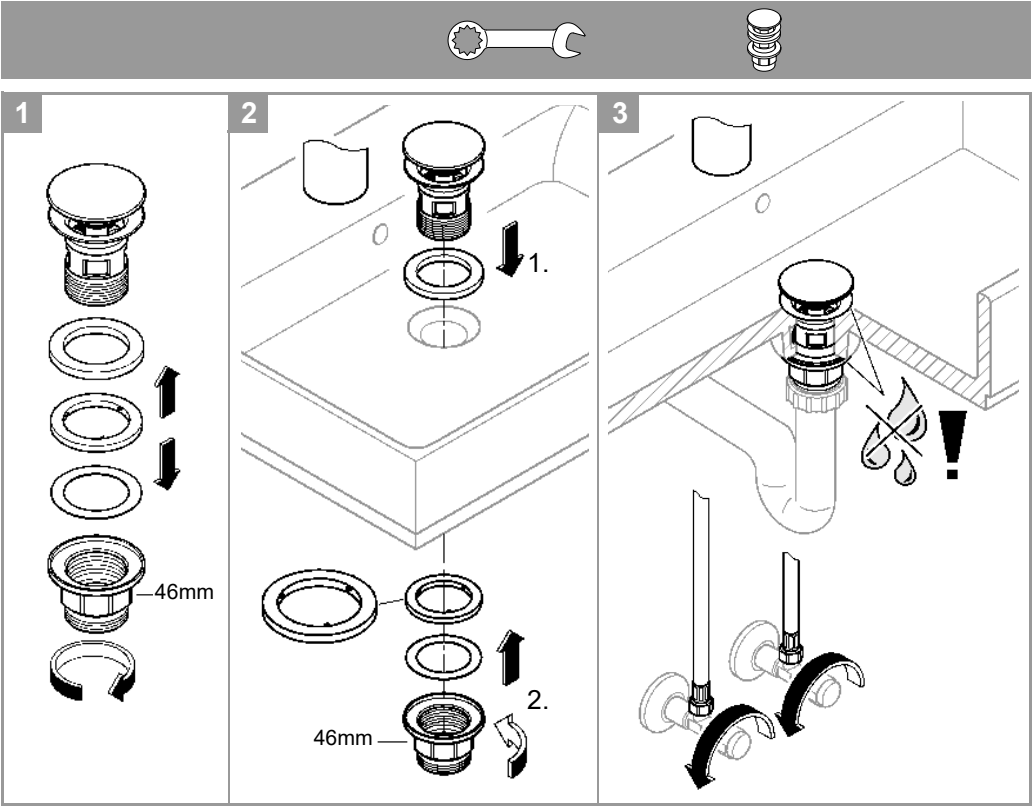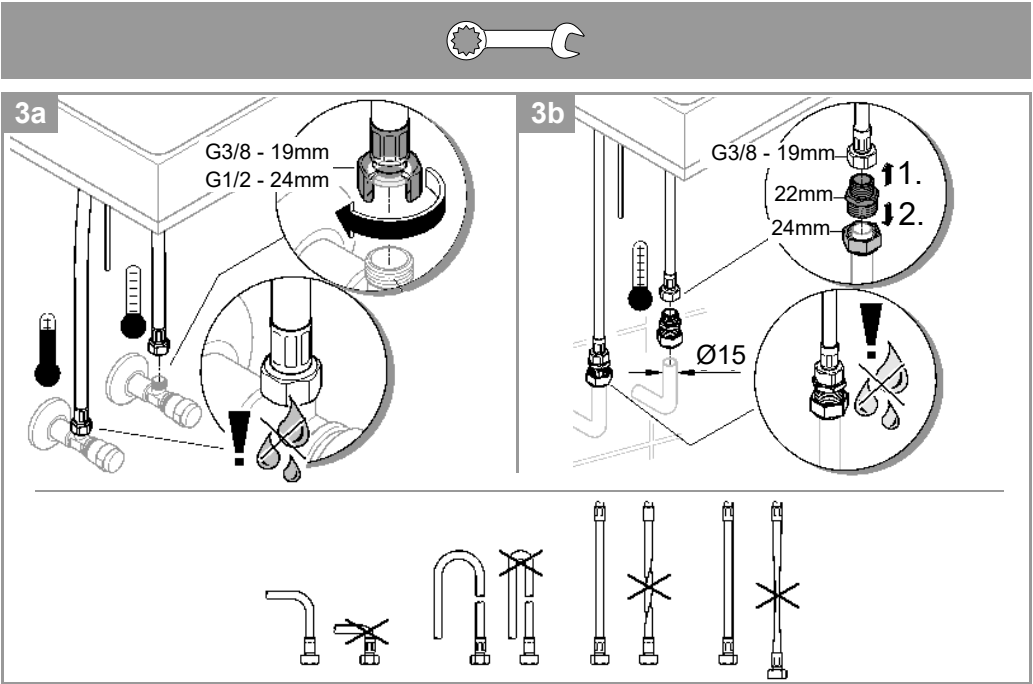





1

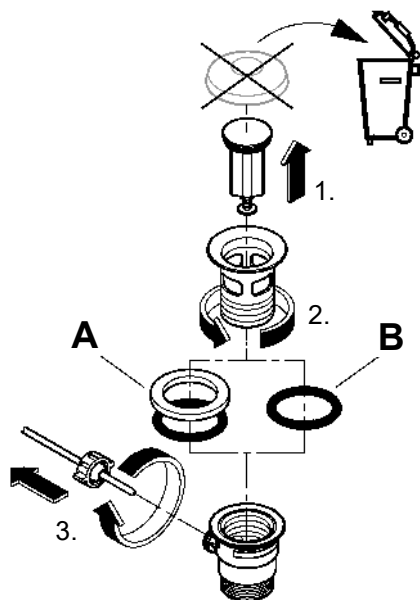


2

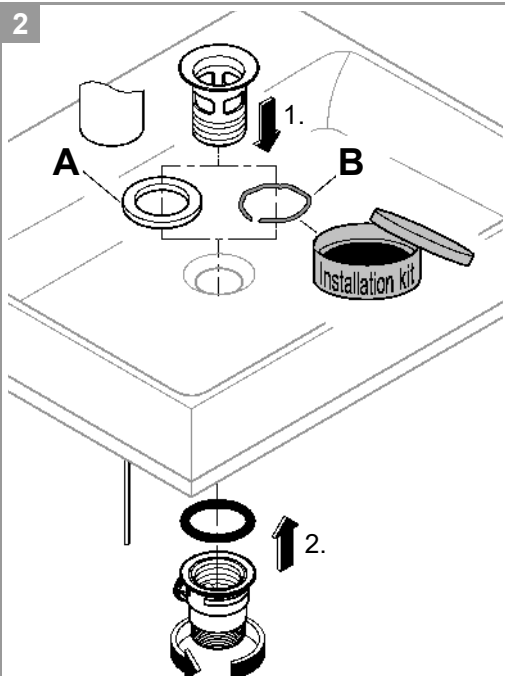

3

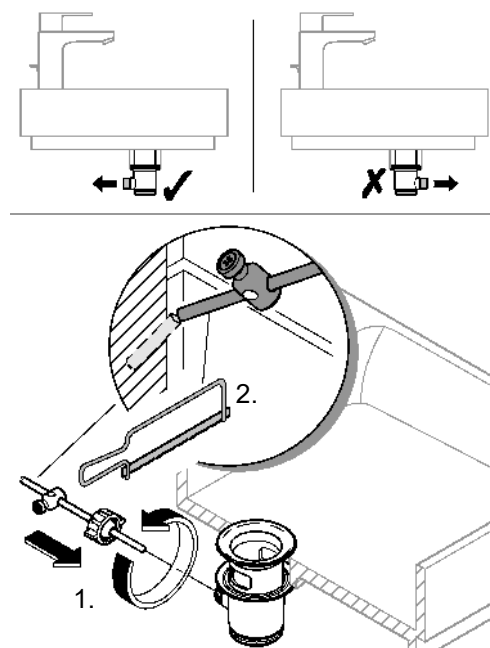


4

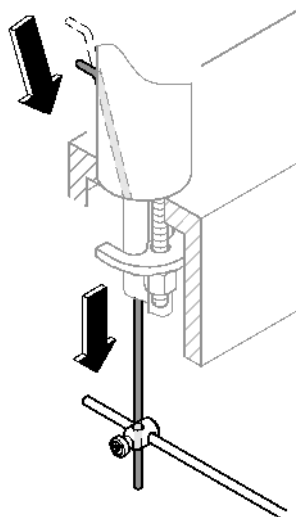




5

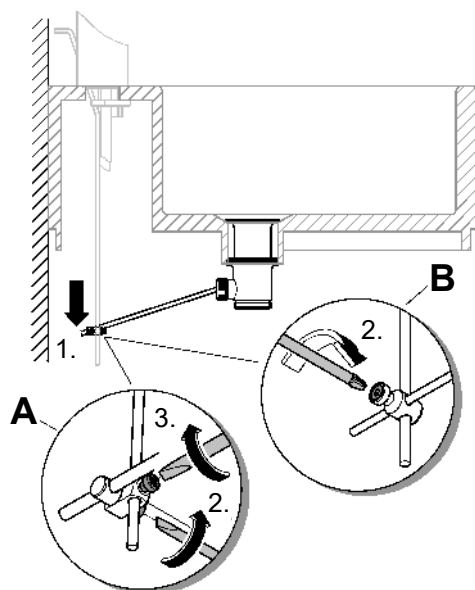

6

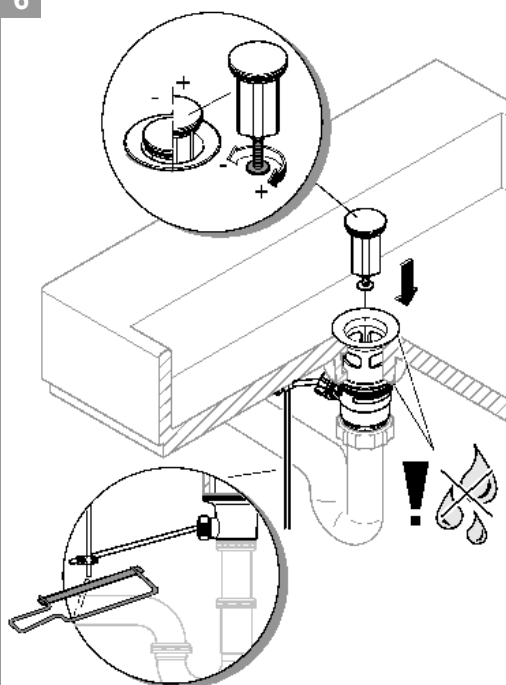

optional

